


Aspen integrated LED accent light with InfiLight

SPECIFICATION SHEET

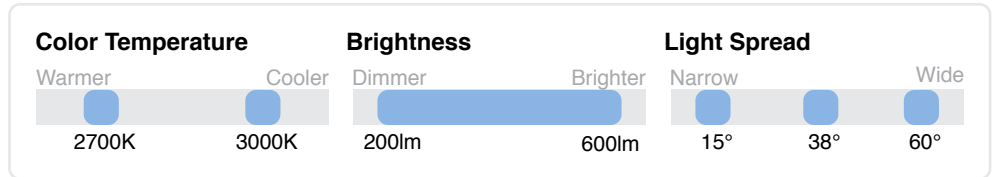

Features

- Custom engineered driver and marine grade virgin brass housing
- InfiLight brightness adjustment from 200 to 600 lumens
- Swappable optics to easily change beam spread
- EZClip connector for color temperature changing in seconds
- Independent LED and driver modules for easy maintenance
- High temperature silicon o-ring between base and shroud
- Base arm features internal locking teeth, o-ring and dual plugs
- Modern innovative design allowing for efficient thermal dissipation

Dimensions and Images



Product Specifications

LED	Brand Color Temperature Dimmable CRI Lumens Lumens per Watt	CREE 2700K or 3000K Yes, using the InfiLight adjustment 80+ 200-600 with InfiLight adjustment 85.7
Optics	Light Spread External Lens Internal Optic	15°, 38° or 60° with changeable optics Convex Glass Polycarbonate
Electrical	Voltage Watts Lead Wire Working Temperature	12V 2W-7W 5 ft. 18 AWG SPT-1 wire with soldered shrink wrapped in-base connection -40°F to 219°F (-40°C to 104°C)
Housing	Material Angle Adjustment Color Ingress Protection Weather Protection	Marine grade virgin brass 30° to 120° using a stainless steel hex nut and internal locking teeth Perfect Bronze, powder coating available IP65 Dust tight and protected against projected water Two high temperature o-rings and two plugs
Dimensions	Diameter Length Weight	1.4 in. (36 mm) 4.5 in. (114 mm) 1.1 lbs (0.5 kg)
	Mounting Options Warranty Standards	Composite stake, 10 in. riser, 20 in. riser Lifetime on brass, 5 years for LED components ETL and cETL (pending)