

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

Ozark 120 Mini Flood Light

SPECIFICATIONS

VOLTAGE: 120 to 277V 50/60Hz (12V option available)

HOUSING: Sealed cast aluminum with dark bronze powdercoat (white available with special order). Adjustable hood available.

MOUNTING: Die-cast aluminum knuckle mount. Stainless steel fasteners. Trunnion and wall mounts available.

AGENCY LISTINGS: DLC and UL approved for wet locations and ground mounting.

WARRANTY: Five years.




Ideal for applications such as landscape lighting, small sign lighting, and building accent lighting. 10kV/10kA surge protection. 150° (7H × 7V) beam.


Model	490692	490693	490673	490694	490695	490674	490696	490697	490675
Description	LED-MF-15W-2700K-120/277	LED-MF-15W-3000K-120/277	LED-MF-15W-5000K-120/277	LED-MF-30W-2700K-120/277	LED-MF-30W-3000K-120/277	LED-MF-30W-5000K-120/277	LED-MF-45W-2700K-120/277	LED-MF-45W-3000K-120/277	LED-MF-45W-5000K-120/277
Wattage	15W	15W	15W	30W	30W	30W	45W	45W	45W
Lumens		1370 lm	1500 lm		2700 lm	3000 lm		5150 lm	5400 lm
Efficacy		91 lm/W	100 lm/W		90 lm/W	100 lm/W		114 lm/W	120 lm/W
Color Temperature	2700K	3000K	5000K	2700K	3000K	5000K	2700K	3000K	5000K
CRI		70	70		70	70		70	70
Equivalent	50W MH	50W MH	50W MH	100W MH	100W MH	100W MH	150W MH	150W MH	150W MH

DIMENSIONS:

15W

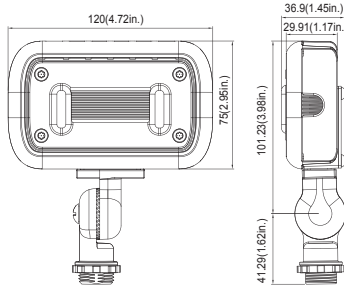

30W

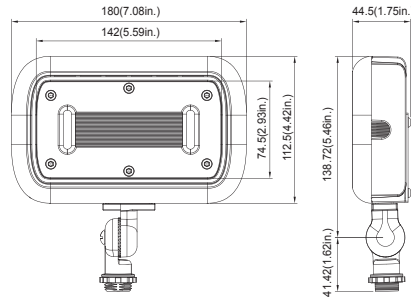

45W

